

5600 SERIES

550 LBS



ETU
-40° to 194°F
95A +/-3



NY
-35° to 248°F
75D +/-3



NY-BB
-35° to 248°F
75D +/-3



*** - Include fitting code into Swivel Part Number (Plate, Bolt Hole or Stem code)

ATTACHMENT OPTIONS

TOP PLATE OPTION


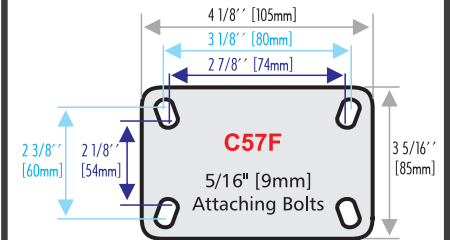


Plate thickness: 5/32" [4mm]
(swivel only)

BOLT HOLE OPTION



STEMS

CODE ↑ DIA. ↑ Length

THREADED BOLT STEM OPTION

3/8 **X Length HO	3/8"	ANY
1/2 **X Length HO	1/2"	ANY

ROUND RUBBER EXPANDABLE ADAPTER

3/4RD EXP	3/4"	3 1/8"
7/8RD EXP	7/8"	3 1/8"
1RD EXP	1"	4 1/8"
1 1/8RD EXP	1 1/8"	4 1/8"
1 3/8RD EXP	1 3/8"	4 1/8"
1 1/2RD EXP	1 1/2"	4 1/8"

SQUARE RUBBER EXPANDABLE ADAPTER

3/4SQ EXP	3/4"	3 1/8"
7/8SQ EXP	7/8"	3 1/8"
1SQ EXP	1"	4 1/8"
1 1/8SQ EXP	1 1/8"	4 1/8"
1 3/8SQ EXP	1 3/8"	4 1/8"
1 1/2SQ EXP	1 1/2"	4 1/8"

PART NUMBER

Size	Tread Width	Material	Bearing Type	Capacity LBS	Overall Height	Swivel Lead	Swivel	Rigid
4"	1 5/8"	ETU	Ball	350	138mm	35mm	S5643C-C57F-ETU-BB	R5643-C57F-ETU-BB
	1 1/2"	NY	Ball	400	138mm	35mm	S5643C-C57F-NY	R5643-C57F-NY
	1 1/2"	NY-BB	Ball	400	138mm	35mm	S5643C-C57F-NY-BB	R5643-C57F-NY-BB
5"	1 5/8"	ETU	Ball	395	165mm	40mm	S5653C-C57F-ETU-BB	R5653-C57F-ETU-BB
	1 1/2"	NY	Ball	450	165mm	40mm	S5653C-C57F-NY	R5653-C57F-NY
	1 1/2"	NY-BB	Ball	450	165mm	40mm	S5653C-C57F-NY-BB	R5653-C57F-NY-BB
6"	1 5/8"	ETU	Ball	425	190mm	38mm	S5663C-C57F-ETU-BB	R5663-C57F-ETU-BB
	1 1/2"	NY	Ball	500	190mm	38mm	S5663C-C57F-NY	R5663-C57F-NY
	1 1/2"	NY-BB	Ball	500	190mm	38mm	S5663C-C57F-NY-BB	R5663-C57F-NY-BB

OPTIONS: (swivel only)

- "DLB" - Total-Lock Brake
- "C" - Raceway Seal (Standard Feature)

FINISH:

- Bright Zinc



EXCELLENT FOR:

- Store Fixtures
- Platform Trucks
- Food Service Equipment
- Hotel Equipment
- Small Waste Bins
- Stock Trucks
- Factory use
- Textile Plants