


## PNEUMATIC AND FLAT FREE CASTERS

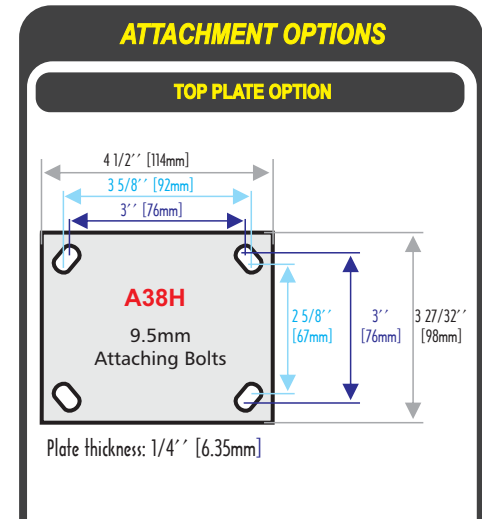

### PART NUMBER

Size	Width	Tread	Type	Capacity LBS	Load Height	Swivel Lead	Swivel	Rigid	PSI
6"	2"	Sawtooth	150-4 Pneumatic	250	7.5"	2"	S6706C-A38H-PNC-BB	R6706-A38H-PNC-BB	30
	2"	Universal	150-4 Foam Pneumatic	200	7.5"	2"	S6706C-A38H-PFC-BB	R6706-A38H-PFC-BB	-
	2"	Sawtooth	150-4 Flat Free	250	7.5"	2"	S6706C-A38H-PFMC-BB	R6706-A38H-PFMC-BB	-
8"	2"	Sawtooth	2.00-4 Flat Free	250	9.5"	2 3/8"	S6708C-A38H-PFMC-BB	R6708-A38H-PFMC-BB	-
8.5"	2.5"	Universal	2.80/2.50-4 Pneumatic	300	10"	2 3/4"	S7908-A38H-PNCV-BB	R7908-A38H-PNCV-BB	50
	2.4"	Centipede	2.50-4 Flat Free	250	10"	2 3/4"	S7908-A38H-PFMCE-BB	R7908-A38H-PFMCE-BB	-
	3"	Jag	2.80/2.50-4 Flat Free	275	10"	2 3/4"	S7908-A38H-PFMCJ-BB	R7908-A38H-PFMCJ-BB	-
10.5"	3.5"	Universal	4.10/3.50-4 Pneumatic	450	11 7/8"	2 5/8"	S7910-A38H-PNCV-BB	R7910-A38H-PNCV-BB	50
	3.3"	Sawtooth	4.10/3.50-4 Flat Free	300	11 7/8"	2 5/8"	S7910-A38H-PMC-BB	R7910-A38H-PMC-BB	-
12.14"	3.5"	Universal	4.10/3.50-6 Pneumatic	450	14"	3"	S7912-A38H-PNCT-BB	R7912-A38H-PNCT-BB	50

### OPTIONS:

- Field Mountable 4 Position Lock (4PSL)
- Top Locking Wheel Brake (TLB)
- Positive Total Lock (PTL)  
- available on 6"X2" and 8"X2" only
- Custom stems available

### FINISH:

- Bright Zinc

