

FEATURES

ALGOOD

- KINGPIN:** 5/16" rivet
- RACEWAY:** 3/16" diameter single race; hardened steel load bearings
- BUSHING:** Nylon
- AXLE&NUT:** 1/4" riveted axle
- FINISH:** Bright chrome
- HARDENED:** Washer
- SPECIAL:** Only the highest quality of bright cold rolled steel is used. 602 & 652 Series are BIFMA approved.
- LEG SPACING:** For BIFMA approved casters, please specify. 0602 - 1 3/4", 0652 - 2", 0672 - 2"



EXCELLENT FOR

- Office furniture
- Institutional equipment
- Hospital environment

OPTIONS

- SLB** Side Locking Brake (for S0652 & S0672 only)
- HT** Heat Treated Yoke (for S0602 & S0652 only)

FINISHES

- Inquiries on other finishes welcome
- 6?A Antique
 - 6?N Nickel
 - 6?1 Brass
 - 6?2 Chrome
 - 6?4 Black

SPECIAL

- 100% non-marking urethane wheels are hard enough for carpeted floors and soft enough for tiled floors
- BIFMA approved (for S0602 & S0652 only)



ENVIROTHANE™



ENVIROTHANE™ GREY



POLYOLEFIN



WHEEL		CASTER			PART NUMBER		
Diameter	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)
1 3/4"	75	Ball	1 13/16"	2 1/2"	Polyolefin	S0602-***-PO	0.44
	75	Ball			Envirothane™	S0602-***-U	0.44
	75	Ball			Envirothane™ Grey	S0602-***-UG	0.44
2"	75	Ball	1 7/8"	2 3/4"	Polyolefin	S0652-***-PO	0.46
	75	Ball			Envirothane™	S0652-***-U	0.51
	75	Ball			Envirothane™ Grey	S0652-***-UG	0.51
2"	75	Ball	1 7/8"	2 3/4"	Polyolefin	S0672-***-PO	0.43
	75	Ball			Envirothane™	S0672-***-U	0.48
	75	Ball			Envirothane™ Grey	S0672-***-UG	0.48

Caster weight based on Standard Plate

PLATE DIAGRAMS

Standard Plate: A12D

Plate Thickness: 3/32"

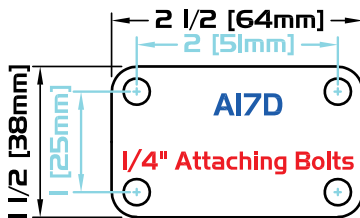

STEMS

THREADED STEMS HEX WASHER

***	DIAMETER	LENGTH	TYPE
5/16-18X13/16HW	5/16"	13/16"	NC
5/16-18X1HW	5/16"	1"	NC
3/8-16X1/2HW	3/8"	1/2"	NC
3/8-16X3/4HW	3/8"	3/4"	NC
3/8-16X1HW	3/8"	1"	NC
3/8-16X1 1/2HW	3/8"	1 1/2"	NC



Threaded Stem HW

THREADED STEMS HEX NUT

***	DIAMETER	LENGTH	TYPE
5/16-18X3/4HN	5/16"	3/4"	NC
5/16-18X1HN	5/16"	1"	NC
3/8-16X5/8HN	3/8"	5/8"	NC
3/8-16X1HN	3/8"	1"	NC
3/8-16X1 1/2HN	3/8"	1 1/2"	NC



Threaded Stem HN

ROUND STEMS

***	DIAMETER	LENGTH	TYPE
375SX1	3/8"	1"	Friction Ring
375	5/16"	1 9/16"	Grip Neck
437X1 7/8	7/16"	1 7/8"	Plain
437SX1	7/16"	1"	Friction Ring
437SX1 5/16	7/16"	1 5/16"	Friction Ring
437SX1 7/8	7/16"	1 7/8"	Friction Ring



375SX1

375

437 X 1 7/8



437S X 1

437S X 1 5/16

437S X 1 7/8